
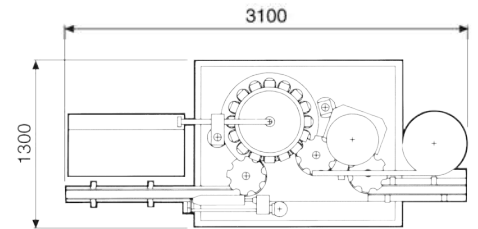
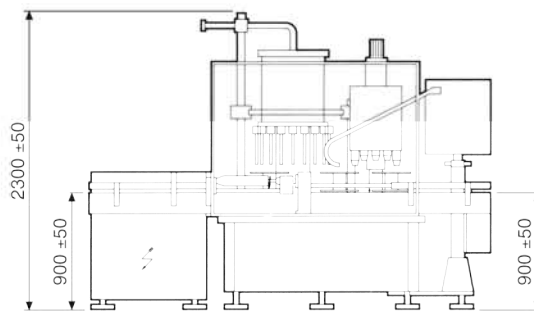



L112 L212

Continuous motion liquid filling and capping monobloc

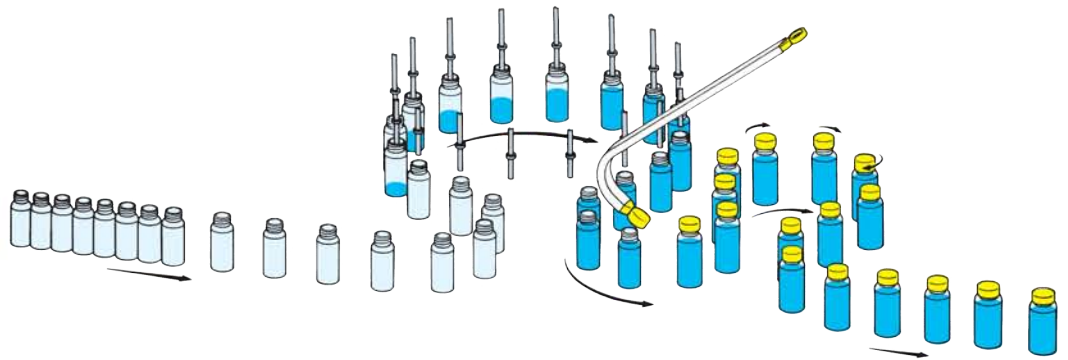

Speed per minute	STROKES	80÷400
Power Absorption (max.)	KW	7
Air Consumption	NI/1'	200
Air Pressure	bar	5÷6
Gross Weight	Kg.	3000
Net Weight	Kg.	2300

		A	B	C
Size range	min.	15	15	35
	max.	100	100	300



The above technical data is not binding and may be subject to change without prior notice.



CAMPAK France

**81, rue Pasteur
77462 St-Thibault des Vignes
Tel:01 60 31 54 68
Fax: 01 60 31 54 69
e-mail: campak@campak.fr**

<http://www.campak.fr>



**Machines
Catalogue**